


Jay-EI 30295 & 30268 Microlites

MICROLITES P/N 30295


MOUNTING HOLE
 $.193 \pm \frac{.005}{.000}$

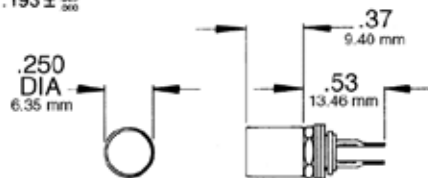

P/N 30268

MOUNTING HOLE
 $251 \pm \frac{.005}{.000}$ DIA HOLE OR $.226 \pm \frac{.005}{.000}$ D PATTERN

CAP STYLES

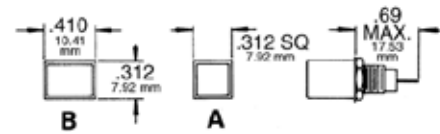

Electrical Options

- **1 Lamp**

Switch Options

- **Indicator**

Lighting Options

- **Lit / Hidden Characters**
- **Lighted Background**
- **NVIS**

Mechanical Options

- **Solder Termination**
- **Front Re-Lamping**
- **Mounting: Round / D**

Environmental Options

- **EMI**
- **MIL-S-22885**

Re-Lampable Miniature Indicator Light

This unique Microlite features a square or rectangular lamp capsule. Re-lamping is accomplished by removing the plug-in lamp capsule and removing the lamp from the indicator body. Lamp used is a T1 bi-pin type available in 2.5V, 28V and four ranges of 5V.

Special Features:

Unit mounts from rear of panel, re-lampable from the front of panel.

Mounts in panels up to 3/16 inch thick.

Standard 10-32 thread.

May be supplied with EMI screen

Alodine aluminum housing standard, black finish also available.

Available with Display Data and a variety of illumination colors.

Mechanical:

Vibration: 10 to 500 Hz

Shock: Per MIL-L-3661, Method 1

Seal: Drip proof per MIL-L-3661

Sand and dust: Per MIL-L-3661

Salt spray: 96 hours

Temperature range: -55°C to +71C

Mounting torque: 2 to 3 in-lbs.